



# Acri-Shield® Stain

## EXTERIOR WATERBASED STAINS



### Solid Color Stains

Provides rich, opaque color that hides the wood grain while allowing the wood's texture to show through.

- 100% acrylic latex
- Application down to 35°F
- Two-coat tannin blocking
- Urethane modified
- Available in 136 popular colors
- Self-priming
- For use on decks, fences, siding, outdoor furniture and more

### Semi-Transparent/ Semi-Opaque Stains

Adds color while allowing wood's natural grain and texture to show through.

- Unique penetrating acrylic/oil resin
- Apply to damp or dry wood
- Application down to 35°F
- Soap and water clean-up
- Can be tinted to 43 semi-transparent and 43 semi-opaque shades; can also be used untinted as a clear coat
- Superior color retention
- For use on decks, fences, siding, outdoor furniture and more

### Toner Waterproofing Sealants

Toners add a hint of natural color to wood's grain and allow texture to show through beautifully.

- Unique penetrating acrylic/oil resin
- Apply to damp or dry wood
- Application down to 35°F
- U.V. protection
- Trans oxide pigments
- Soap and water clean-up
- Available in 4 natural tones
- For use on decks, fences, siding, outdoor furniture and more

#### AVAILABLE PRODUCTS

Code	Product Name	Sizes
PP1975	White/Pastel Base	1s & 5s
PP1974	Ultra Deep Base	1s & 5s

#### AVAILABLE PRODUCTS

Code	Product Name	Sizes
PP1952	Neutral Base/Clear	1s & 5s

#### AVAILABLE PRODUCTS

Code	Product Name	Sizes
PP2310	Naturaltone	1s & 5s
PP2301	Cedar Naturaltone	1s & 5s
PP2305	Redwood Naturaltone	1s & 5s
PP2307	Canyon Brown	1s & 5s

## SOLID COLOR 100% ACRYLIC LATEX STAIN



**Superior Adhesion** Your deck should withstand heavy foot-traffic. Superior adhesion means better durability for the long-haul for your deck and your siding.



Acri-Shield Solid Color Stain



Competitor A



Competitor B

The adhesion of each coating was evaluated according to ASTM D 3359-93, Method B.

### Exceptional Hiding



Blank Leneta 12H "Zebra" chart



Acri-Shield Solid Color Stain



Competitor A



Competitor B

Each stain was brush-applied to Leneta Form 12H Zebra chart according to the natural spread rate of each.

## EXTERIOR ACRYLIC/OIL PENETRATING FORMULAS




**Excellent Fade Resistance vs. Conventional Oils** Keep your deck looking new with the penetrating and fade-resistant formula of Acri-Shield acrylic/oil stains.



Acri-Shield Acrylic/Oil Semi-Transparent Stain



Conventional Oil Stain

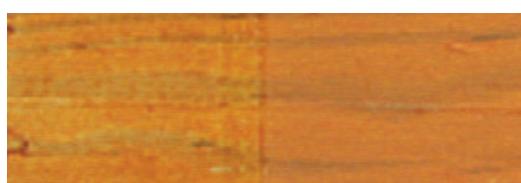


Acri-Shield Acrylic/Oil Toner




Conventional Oil Toner

A single coat of each product was applied to pressure treated lumber and allowed to cure for seven days. Panels were then placed in an Atlas CI5000 Weatherometer running standard test G26A.

### Acrylic/Oil Resin – Penetrating Formula

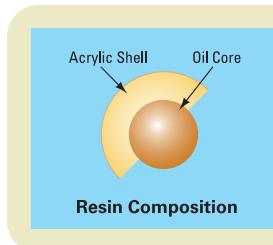

The unique characteristics of this product can be attributed to the state-of-the-art acrylic/oil structure of the resin, in which an alkyd core is encapsulated within an acrylic shell. This two-stage dry mechanism provides excellent open time, lap resistance, and stability, and allows the oil to penetrate deep into the wood while leaving a protective acrylic shell.

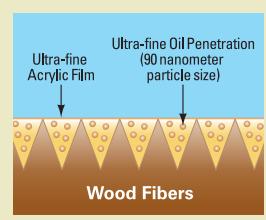

PPG Porter Paints. It starts with our people, flows through our paints, and lasts with our customers for life.



PPG  
PORTER® PAINTS

PPG Architectural Coatings • One PPG Place • Pittsburgh, PA 15272  
[www.ppgporterpaints.com](http://www.ppgporterpaints.com) • Technical Service 1.800.441.9695  
 Architect/Specifier 1.888.PPG.IDEA